

INSTALLATION INSTRUCTIONS FOR INSTALLING TRADITIONAL FACE KITS FOR USE WITH THE RAVENNA 33/40 AND DESIGNER GAS FIREPLACE INSERTS

ELITE™ SERIES

KIT CONTENTS (See Figure 1)

Please ensure that all these parts are included

- 1 ea. Face
- 1 ea. Instruction Sheet

Traditional Face Kits		
Cat. No.	Model	Description
75167	DBV-RDV F-B G	Black Face / Gold Trim
75168	DBV-RDV F-G	Gold Face
75006	DBV-RDV TRDF-BKN	Black Nickel Face
75045	DBV-RDV TRDF-BN	Brushed Nickel Face

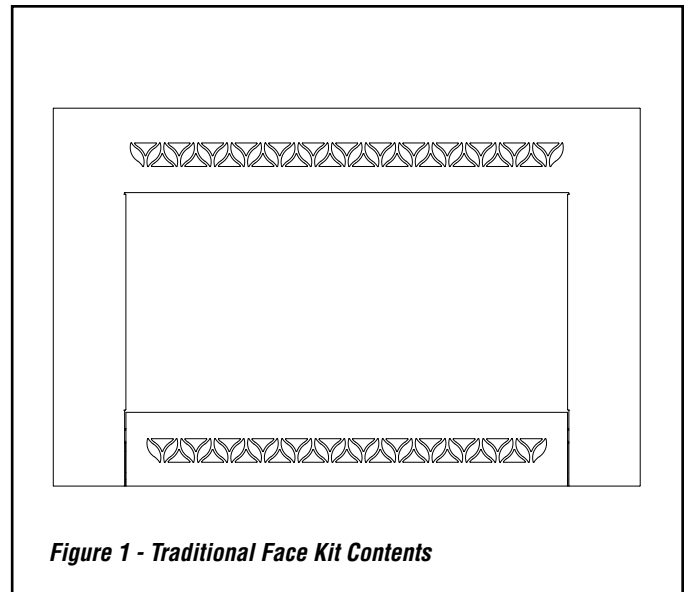


Figure 1 - Traditional Face Kit Contents

TOOLS NEEDED

- 3/8" Nutdriver or Wrench
- Phillips Screwdriver

GENERAL INFORMATION

All of these parts may scratch and bend, great care should be used in handling them.

If you encounter any problems, need clarification of these instructions or are not qualified to properly install this kit, contact you local distributor or dealer.

Read this instruction sheet in its entirety before beginning the installation.

ALL WARNINGS AND PRECAUTIONS IN THE INSTALLATION AND OPERATION MANUAL PROVIDED WITH THE APPLIANCE APPLY TO THESE INSTRUCTIONS.


TURN OFF THE FIREPLACE AND ALLOW IT TO COMPLETELY COOL BEFORE PROCEEDING.

INSTALLATION INSTRUCTIONS

Installation of the surround assembly is required prior to installing the Traditional Face Kit. Install the surround assembly per instructions in the installation and operation manual provided with the fireplace insert.

- Step 1.** Install the face onto the surround brackets as shown in **Figure 2**. Each side of the face has a bracket with two (2) hooks. Place the face on the surround hanging brackets as seen in **Figure 2** by placing the hooks on position C.


IMPORTANT: If you have a gold or nickel face, be sure and clean the face with a soft cloth and household glass cleaner prior to burning the insert. Finger prints left on the face while burning will usually remain on the face permanently.

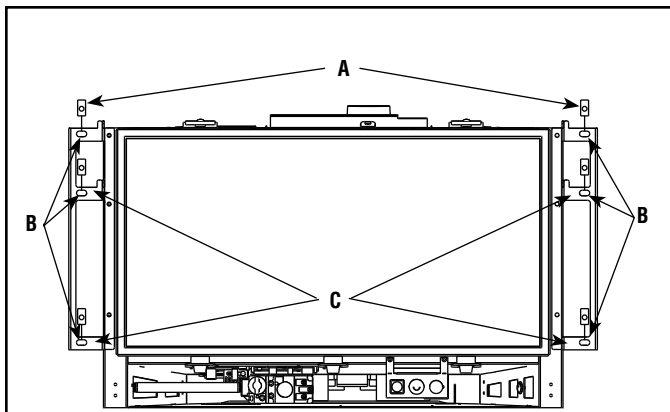

A = Speed nuts
 B = Holes in the surround brackets - three on each side
 C = Location where hooked brackets on face will hang

The face has two hooks on each side that slide over and hang on the surround brackets at position C shown here. The face may slide slightly from side to side to center the face on the glass.

Figure 2

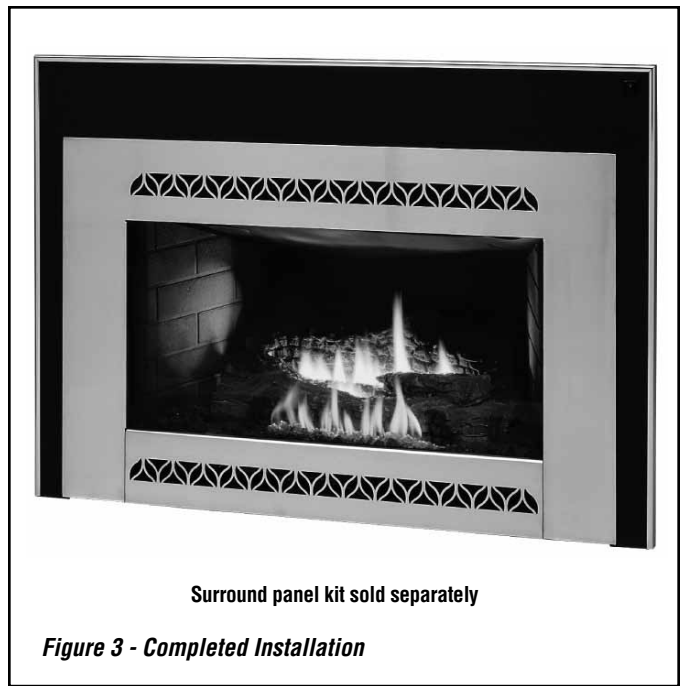

Surround panel kit sold separately

Figure 3 - Completed Installation

CAUTION: WHEN OPENING THE LOWER DOOR ON THE TRADITIONAL FACE WHILE THE INSERT IS BURNING, ONE SHOULD PULL AT THE FAR LEFT OR FAR RIGHT VENT OPENINGS AS THE DOOR IS HOT DURING OPERATION.

NOTE: DIAGRAMS & ILLUSTRATIONS ARE NOT TO SCALE

Lennox Hearth Products reserves the right to make changes at any time, without notice, in design, materials, specifications, prices and also to discontinue colors, styles and products. Consult your local distributor for fireplace code information.

LENNOX
 HEARTH PRODUCTS