

INSTALLATION INSTRUCTIONS


For
Direct Vent Option Series
Hood Kits

Black Models
_BH-33C
And _BH-38C

Brass Models
_PBH-33C, _PBH-38C
And _PBH-43C

Designed For Use With
Louvered-Face Direct Vent
Decorative Gas Appliances

Models
_DVC-33
_DVH-33, _DVC-38
And _DVC-43

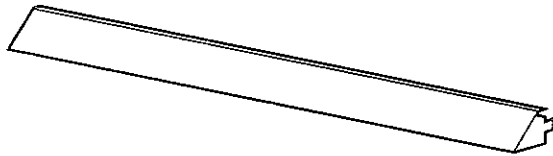

Note: Underscore is used here in place of a letter character which varies by product line. Letter shown in the first position of the Model Number is designated as follows: S = Superior, F = Fireplus, H = Hearthstar

NOTE: DIAGRAMS & ILLUSTRATIONS NOT TO SCALE.

SFC reserves the right to make changes at any time, without notice, in design, materials, specifications, prices and also to discontinue colors, styles and products. Consult your local distributor for fireplace code information.

Printed in U.S.A. © 1996 by SFC
P/N 901381 REV. B 10/96

These hood kits are designed to be fitted to the face of the appliance directly above the door. In addition to providing an aesthetically pleasing appearance to your appliance installation, the hood reduces heat effects to decorative mantles and finish materials located directly above the fireplace opening. These kits can be retrofitted to previously installed appliances.

Use Models _BH-33C and _PBH-33C on the _DVC-33 and _DVH-33 appliances. Use Models _BH-38C and _PBH-38C on the _DV-38 appliances. Use Models _PBH-43C on the _DV-43 appliances.

The hood kits described in this document contain all the components necessary to complete the task.

The manufacturer recommends that the installation manual provided with the appliance be read completely and understood thoroughly before proceeding with the installation of the kit. All warnings and precautions in that document apply to these instructions.

INSTALLATION

Note: Prior to installing the brass components remove all of the protective plastic coating.

Step 1. To install either the black or brass hood kit on the _DVC models, remove the existing top most louver located above the appliance door. On the _DV-43, remove the existing Black Hood. The louver is snapped into place over pegs located at both ends. To remove, grasp the louver firmly and twist upwards releasing the bottom of the louver with a snap. Lift the top of the louver from the pegs.

Step 2. Install the black or brass hood by aligning the tabs at each end with the slots located on the hinge brackets. Slide the tabs through the slots and bend over to secure.

To install Model _PBH-33C on the _DVH models, remove the black hood. The hood is held in position by two (2) tabs that engage the hinge brackets at each end. To remove, straighten the tabs and slide the hood from the slots.

SFC

4325 Artesia Avenue • Fullerton, CA 92833
714-521-7302
503 East Reelfoot Avenue • Union City, TN 38261
901-885-7621